




D15 Series

1. Screw threaded assembly, simple in using, convenient in installation;
2. Nylon material, stable electrical performance, high-strength resistance to pressure, anti-heat, anti-explosion, and corrosion;
3. Products are in line with the National Semiconductor Industry Alliance, CSA016 standards
4. The male plug could match our DR-T08.

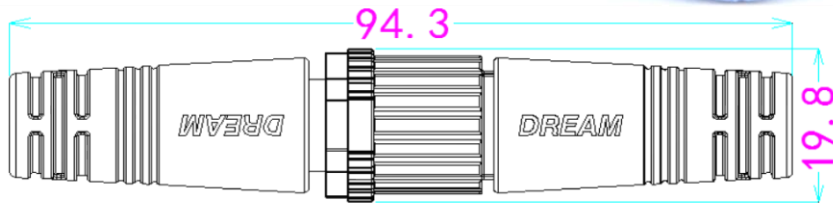

Simple parameters

Pins number	Rated current	Rated voltage	Contact resistance	Insulation resistance	IP-Code	Cable Specifications	Cable Range
2	8A	250V AC	10mΩ	200MΩ	IP68	≅ 1.5mm ²	0-9mm
3	8A	250V AC	10mΩ	200MΩ	IP68	≅ 1.5mm ²	0-9mm

Other parameters

Operating temperature: PA66: -40°C ~ +105°C

Plug/unplug durability: 1500 times

Connection mode: Screw threaded

Pins layout



2 Pole



3 Pole